


SINGLE SIDED, SINGLE COLOR

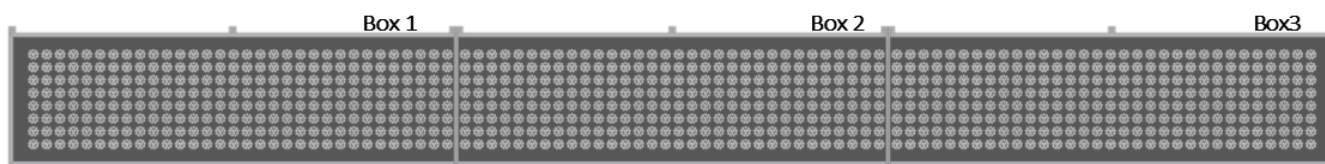

Technical Features

| | |
|--|----------------------|
| Model | HTM40-1-16 SMD xxx |
| Operating Voltage | DC 230 Vac 50/60 Hz |
| Power | 660 W |
| Graphic resolution | 96x8 pixel |
| Characters per page | 16 |
| LED pitch | 60 mm. |
| LED per pixel | 12 |
| LED type | 2835 |
| Dimension | 5960 x 680 x 190 mm. |
| Connection mode | RS 232 |
| Text graphics and GIF animations | Yes |
| Time and date functions | Yes |
| Programs scheduling | Yes |
| Page entry and exit effects | Yes |
| Viewing Angle | 120° |
| Operating temperature range | -20C° ~ +60 C° |
| Storage temperature range | +5 C°~ +40 C° |
| Storage environment humidity | RH < 60% |
| IP protection | IP 54 |
| LED Life time | 80.000h * |
| Warranty (Download terms and conditions pdf) | 3 Years |

Description

Single face single color LED panel, suitable for messaging. Consisting of 3 pcs box with dimensions as per drawing above.

Panel suitable for outdoor installation, functioning independently, the brightness is controlled by a bright sensor.

The panel can display text, graphics and GIF animations. The PC programming software is included.

Positioning and fixing

The box is equipped with upper and lower brackets for wall mounting. The 3 boxes must be mounted side by side so as to obtain a single display.

| Model | Color | Code |
|-----------------------------------|-------|--------------|
| HTM8-1-24 SMD Monofacciale rosso | Red | G 100 000286 |
| HTM8-1-24 SMD Monofacciale ambra | Amber | G 100 000287 |
| HTM8-1-24 SMD Monofacciale bianco | White | G 100 000226 |
| HTM8-1-24 SMD Monofacciale verde | Green | G 100 000364 |


LED characteristic

| Color | Luminosity |
|-------------|------------|
| White 6500k | 3200 MCD |
| Amber | 2270 MCD |
| Red | 1000 MCD |
| Green | 1200 MCD |



Data Sheet

CABINET SIZE

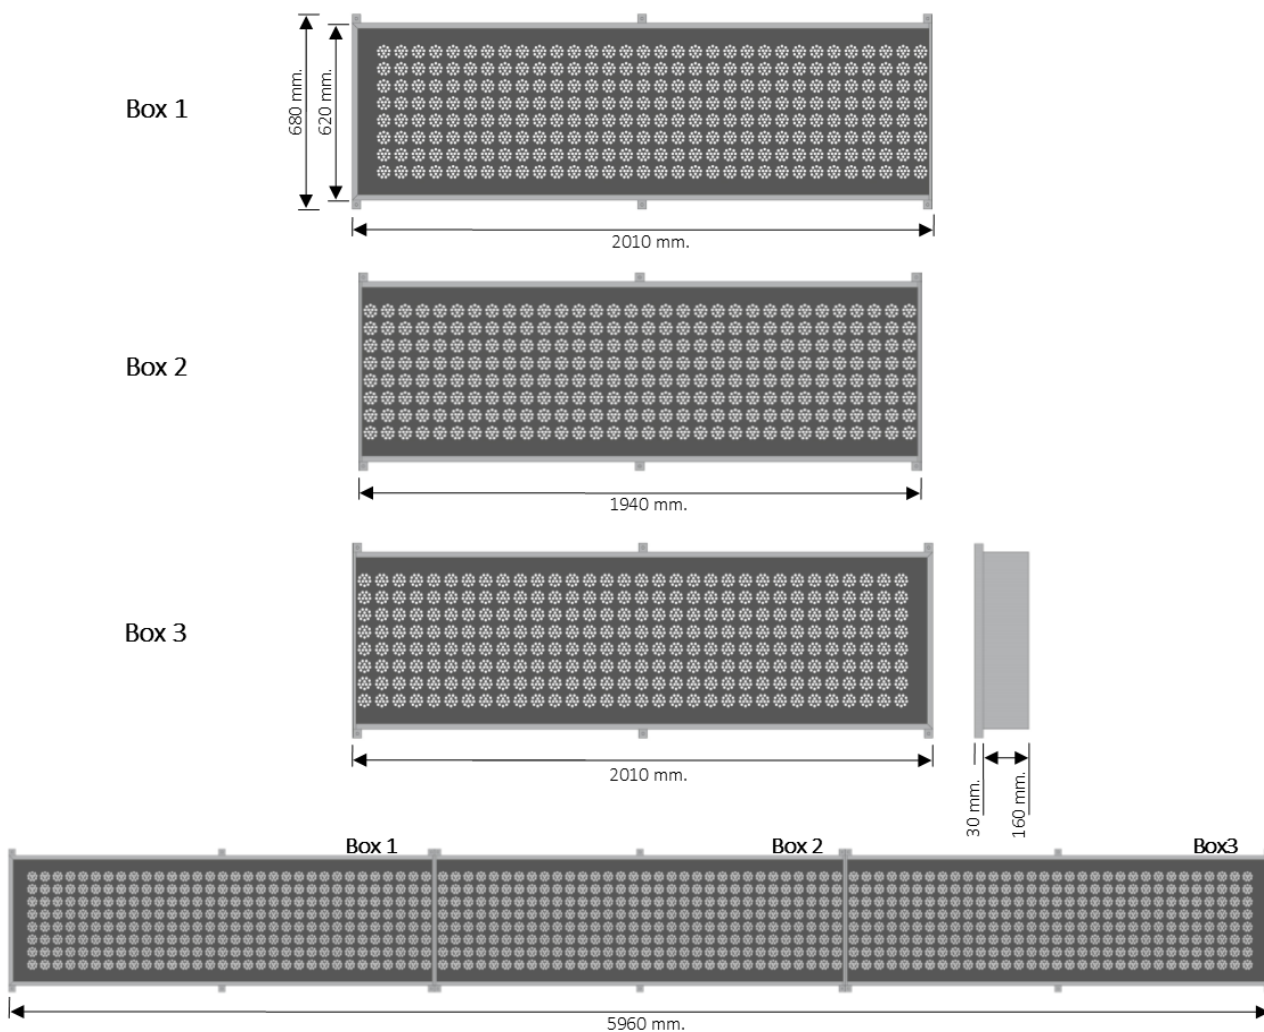

CABINET CONNECTION

