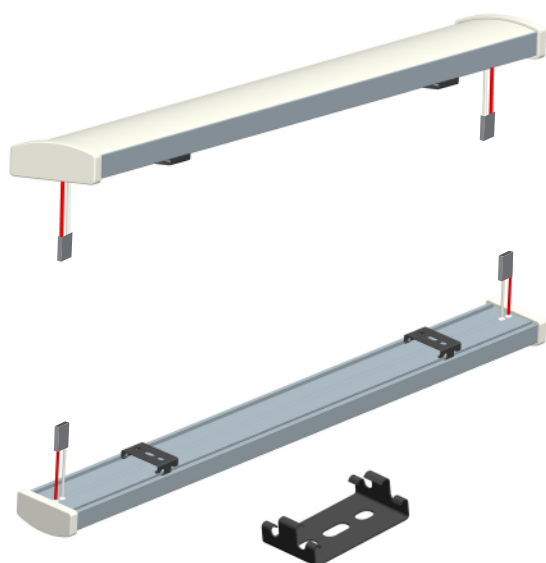


Model	Code	Dimension	CCT	Luminous Flux	Consumption	Max. lamps in serie	Brackets
KAILO30-24-L18-C3	LHT 00068	L 1704; W 60; H 27	5000 k	3650 Lm / lamp.	25 W / lamp.	4 Lamps	4 pcs Brackets
KAILO30-24-L18-N3	LHT 00069	L 1704; W 60; H 27	3500 k	3360 Lm / lamp.	25 W / lamp.	4 Lamps	4 pcs Brackets
KAILO40-24-L24-C3	LHT 00070	L 2265; W 60; H 27	5000 k	4865 Lm / lamp.	32 W / lamp.	3 Lamps	5 pcs Brackets
KAILO40-24-L24-N3	LHT 00071	L 2265; W 60; H 27	3500 k	4480 Lm / lamp.	32 W / lamp.	3 Lamps	5 pcs Brackets

Features

Operating voltage	DC 24 V
International protection level	IP66 - IP67
Color rendering index (CRI)	>80
Operating temperature range	-30 C° ~ +50 C°
Storage temperature range	+30 C° ~ +60 C°
Storage enviroment humidity	RH < 70%
IEC protection class (with SELV power supply)	Class III
Life time (L70)	60.000h (L70)
Life	100.000h
Snap-on fixing bracket	Stainless steel
Warranty (See term and condition)	5 Year

Description

Surface mounted linear lamp, very versatile and easy to install. The stainless steel bracket with snap-on attachment offers a safe and long-lasting fixing.

Applications

- Petrol Station Canopy, portico
- Warehouse, Shed, Garage
- Shop centre

Benefits

- Quick and safe installation with stainless steel brackets
- High efficiency lamp
- Color Rendering Index, Ra: >80.
- Constant Voltage Power Supply 24VDC
- Power wires on both ends for series assembly of multiple units (see maximum quantities in the table)

Accessories	Code	Lenght
Power cable, Male connector	CAV 000838	150 mm
Power cable, Female connector	CAV 000839	150 mm
Extension cable, M/F connectors	CAV 000840	3000 mm
Stainless steel bracket	STA 000095	

